

# 432A


## D/C PE Foam Tape

### DESCRIPTION

The Decker 432A is a 1/32" thick closed-cell, cross linked polyethylene foam tape coated on both sides with a solvent acrylic adhesive protected by a white glassine paper liner.

### FEATURE

- Applications: plastic extrusion, signage, wire raceways, wire mounts, trim
- Good conformability, cushioning and vibration dampening
- Low application temperature and low compression set
- Great chemical resistance
- Ideal for die cutting

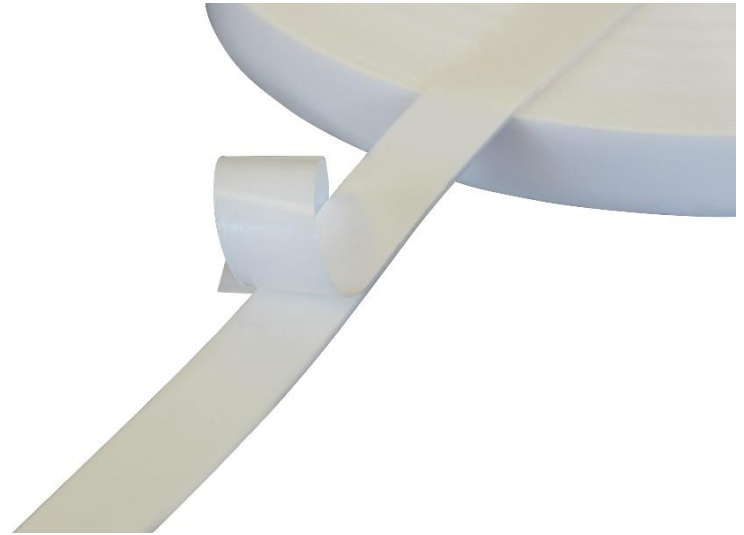

### TECHNICAL DATA (Average Values)

Thickness	1/32"
Backing	Polyethylene Foam
Adhesive	Solvent Acrylic
Adhesion	63.5 oz/in
Temperature	-22° TO 194°F
Color	White

This Technical Data Sheet (TDS) is provided by Decker Tape for information purposes only. The contents of this TDS are considered reliable but accuracy is not guaranteed. This data is of average values and does not constitute a warranty of fitness for a particular purpose. The user is required to determine the suitability for this purpose, by test or otherwise. Any liability arising in respect of our products, including consequential, will be limited to the value of those products charged to the customer excluding any consequential loss. We reserve the right to make changes without notice or obligation in our products and publications.