

463


5 MIL High Tack Adhesive Transfer Tape - ATG

DESCRIPTION

The Decker 463 is a 5 mil unsupported adhesive transfer tape with high tack performance for difficult surfaces. This product is reverse wound with 1" ID ATG core.

FEATURE

- Applications: general purpose bonding, mounting, splicing, core startup, sealing envelopes
- Dispenser system provides smooth lay down of adhesive and automatically rewinds tape's liner inside the dispenser as tape is applied
- High performance acrylic designed for bonding porous or uneven substrates
- Very quick stick and excellent holding power at elevated temperatures

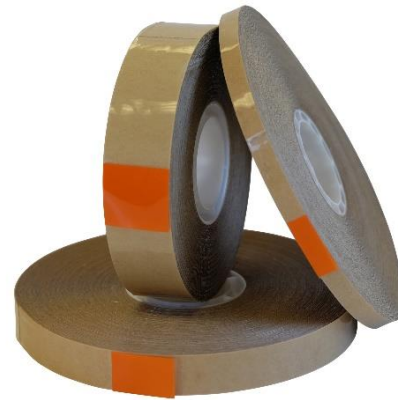

TECHNICAL DATA (Average Values)

Thickness	5 Mils
Adhesive	Solvent Acrylic
Adhesion	110 oz/in
Temperature	-22°F to 230°F

This Technical Data Sheet (TDS) is provided by Decker Tape for information purposes only. The contents of this TDS are considered reliable but accuracy is not guaranteed. This data is of average values and does not constitute a warranty of fitness for a particular purpose. The user is required to determine the suitability for this purpose, by test or otherwise. Any liability arising in respect of our products, including consequential, will be limited to the value of those products charged to the customer excluding any consequential loss. We reserve the right to make changes without notice or obligation in our products and publications.