

960


Aluminum Foil Tape *Lined*

DESCRIPTION

The Decker 960 is a dead soft aluminum foil tape coated with a very aggressive rubber adhesive. This product is on a release liner.

FEATURE

- Applications: HVAC industry to seal duct joints, temporary metal repair, waterproof sealing of drums and canisters, moisture barrier and secure wires in appliances, seal edge of double-pane thermo windows
- Backing is a 2 mil, dead soft aluminum foil
- Highly conformable to irregular or curved surfaces due to dead soft nature of foil
- Excellent moisture barrier properties
- Excellent quick stick and ultimate adhesion

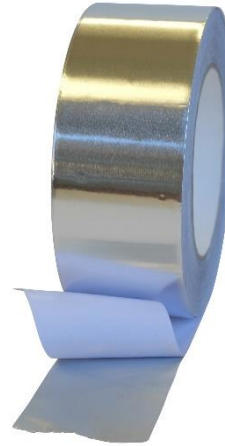

TECHNICAL DATA (Average Values)

Thickness	4 Mils
Backing	Dead Soft Aluminum Foil
Adhesive	Acrylic
Tensile	18 lbs/in
Adhesion	64 oz/in
Elongation	3%
Temperature	-20° TO 260°F

This Technical Data Sheet (TDS) is provided by Decker Tape for information purposes only. The contents of this TDS are considered reliable but accuracy is not guaranteed. This data is of average values and does not constitute a warranty of fitness for a particular purpose. The user is required to determine the suitability for this purpose, by test or otherwise. Any liability arising in respect of our products, including consequential, will be limited to the value of those products charged to the customer excluding any consequential loss. We reserve the right to make changes without notice or obligation in our products and publications.