

963A


Aluminum Foil Tape *Lined*

DESCRIPTION

The Decker 963A is a dead soft aluminum foil tape coated with an all-weather acrylic adhesive. This product is on a release liner.

FEATURE

- Applications: HVAC industry to seal duct joints, temporary metal repair, waterproof sealing of drums and canisters, moisture barrier and secure wires in appliances, seal edge of double-pane thermo windows
- Highly conformable to irregular or curved surfaces due to dead soft nature of foil
- Excellent moisture barrier properties
- Performs well over a wide range of environmental conditions

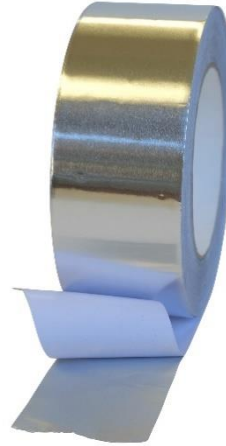

TECHNICAL DATA (Average Values)

Thickness	3.5 Mils
Backing	Dead Soft Aluminum Foil
Adhesive	Solvent Acrylic
Tensile	17 lbs/in
Adhesion	90 oz/in
Elongation	3.5%
Temperature	-25°F and Above

This Technical Data Sheet (TDS) is provided by Decker Tape for information purposes only. The contents of this TDS are considered reliable but accuracy is not guaranteed. This data is of average values and does not constitute a warranty of fitness for a particular purpose. The user is required to determine the suitability for this purpose, by test or otherwise. Any liability arising in respect of our products, including consequential, will be limited to the value of those products charged to the customer excluding any consequential loss. We reserve the right to make changes without notice or obligation in our products and publications.